


High Temp. Automotive VT Series

+150°C and 175°C Rated Varistors



GENERAL DESCRIPTION

AVX High Temperature 150/175°C Multi-Layer Varistors are designed for underhood and other high temperature automotive or industrial applications. Parts are AEC-Q200 qualified.

They offer bi-directional overvoltage protection as well as EMI/RFI attenuation in a single SMT package. This allows designers the ability to combine the circuit protection and EMI/ RFI attenuation function into a single highly reliable device.

Products have been tested, qualified, and specified to 150/175°C and they do not require any derating over specified operating temperature range.

GENERAL DESCRIPTION

- Operating Temp.:
- VTA3: -55 to +150°C
- VTA7: -55 to +175°C
- Working Voltage: 14 - 31Vdc
- Case Size: 0603 - 1210

FEATURES

- +150/175°C rated, with no derating
- High Reliability
- AEC Q200 Qualified
- Bi-Directional protection
- EMI/RFI attenuation
- ESD rated to 25kV (HBM ESD Level 6)

APPLICATIONS

- Under hood
- Down Hole Drilling
- High temperature Automotive and Industrial Applications

HOW TO ORDER

VT
Varistor Temp Rated

A7
Automotive
175°C
A3 = 150°C
A7 = 175°C

0603
Case Size
0603
0805
1206
1210

18
Working Voltage
12=12Vdc
14=14Vdc
18=18Vdc
26=26Vdc
31=31Vdc
38=38Vdc
48=48Vdc

A
Energy Rating
A=0.1J
C=0.3J
E=0.5J
J=1.6J

400
Clamping Voltage
300=32V
350=35V
400=42V
650=65V
670=67V

R
Package
D = 7" (1,000)
R = 7" (4,000)
T = 13" (10,000)

P
Termination
P = Ni/Sn plated




MSL 1
Pb Free 260°C

DIMENSIONS

mm(inches)

Size (EIA)	Length (L)	Width (W)	Max Thickness (T)	Land Length (t)
0603	1.60±0.15 (0.063±0.006)	0.80±0.15 (0.031±0.006)	0.90 (0.035)	0.35±0.15 (0.014±0.006)
0805	2.01±0.20 (0.079±0.008)	1.25±0.20 (0.049±0.008)	1.02 (0.040)	0.71 max. (0.028 max.)
1206	3.20±0.20 (0.126±0.008)	1.60±0.20 (0.063±0.008)	1.02 (0.040)	0.94 max. (0.037 max.)
1210	3.20±0.20 (0.126±0.008)	2.49±0.20 (0.098±0.008)	1.70 (0.067)	1.14 max. (0.045 max.)



High Temp. Automotive VT Series

+150°C and 175°C Rated Varistors



ELECTRICAL CHARACTERISTICS VTA3 (150°C)

AVX PN	V _w (DC)	V _w (AC)	V _B	V _C	I _{VC}	I _L	E _T	E _{LD}	I _P	Cap	Freq	V _{Jump}	P _{Diss. Max}
	Vdc	Vac	V	V	A	μA	J	J	A	pF		V	W
VTA3040205X150	5.6	4.0	8.5±20%	18	1	10	0.05	-	20	200	K	-	0.001
VTA3080512D250	12	8.5	16±15%	27	1	10	0.4	-	200	900	K	-	0.008
VTA3080514C300	14	10	18.5±12%	32	1	10	0.3	0.7	120	900	K	20	0.006
VTA3120614E300	14	10	18.5±12%	32	1	10	0.5	1.3	200	1400	K	20	0.01
VTA3121014J300	14	10	18.5±12%	32	2.5	10	1.6	3	500	5000	K	20	0.03
VTA30402018X400	18	13	25.5±10%	42	1	10	0.05	-	20	60	K	27.5	0.001
VTA3121031R650	31	25	39±10%	65	2.5	10	1.7	4.5	300	1500	K	20	0.03
VTA3080538E770	38	30	47±10%	77	1	10	0.5	1	120	275	K	48	0.01
VTA3120642R800	42	32	51±10%	80	1	10	1.7	2.0	250	750	K	48	0.003

ELECTRICAL CHARACTERISTICS VTA7 (175°C)

AVX PN	V _w (DC)	V _w (AC)	V _B	V _C	I _{VC}	I _L	E _T	E _{LD}	I _P	Cap	Freq	V _{Jump}	P _{Diss. Max}
	Vdc	Vac	V	V	A	μA	J	J	A	pF		V	W
VTA7060314A300	14	10	18.5±12%	32	1	10	0.1	-	50	400	K	20	0.003
VTA7060314E350	14	10	20.5±10%	35	1	10	0.5	-	120	900	K	20	0.01
VTA7060318A400	18	13	23±10%	42	1	10	0.1	0.25	30	275	K	27.5	0.003
VTA7080518C400	18	13	25.5±10%	42	1	10	0.3	1	120	450	K	27.5	0.006
VTA7080526D580	26	18	34.5±10%	60	1	10	0.4	0.6	100	275	K	29	0.008
VTA7060331A670	31	25	39±10%	67	1	10	0.1	0.25	30	90	M	29	0.003
VTA7080531C650	31	25	39±10%	65	1	10	0.3	1	80	275	K	29	0.006
VTA7120648M10	48	34	62±10%	100	1	10	1.0	1.5	200	300	K	48	0.002

V_w(DC) DC Working Voltage [V]

V_w(AC) AC Working Voltage [V]

V_B Typical Breakdown Voltage [V @ 1mA_{DC}]

V_C Clamping Voltage [V @ I_{VC}]

I_{VC} Test Current for V_C

I_L Maximum leakage current at the working voltage, 25°C [μA]

E_T Transient Energy Rating [J, 10x1000μS]

E_{LD} Load Dump Energy (x10)

I_P Peak Current Rating [A, 8x20μS]

Cap Typical capacitance [pF] @ frequency specified and 0.5V_{RMS}, 25°C

V_{Jump} Jump Start (V)

P_{Diss. Max} Power Dissipation (W)


ESD RATING

AVX PN	IEC 61000-4-2	ISO 10605		AEC-Q200 (Lvl.6)
	150 pF / 330 Ω Contact Discharge	330 pF / 330 Ω Contact Discharge	330 pF / 2000 Ω Contact Discharge	150 pF / 2000 Ω Air Discharge
VTA3 (150°C)				
VTA3080514C300	30kV	30kV	30kV	25kV
VTA3120614E300	30kV	30kV	30kV	25kV
VTA3121014J300	30kV	30kV	30kV	25kV
VTA3121031R650	30kV	30kV	30kV	25kV
VTA7 (175°C)				
VTA7060318A400	25 kV	30 kV	30 kV	25 kV
VTA7080518C400	30 kV	30 kV	30 kV	25 kV
VTA7060331A670	30 kV	30 kV	30 kV	25 kV
VTA7080531C650	30 kV	30 kV	30 kV	25 kV


High Temp. Automotive VT Series

+150°C and 175°C Rated Varistors

VTA3 (+150°C): POWER DERATING CURVE (CURRENT, ENERGY, POWER)

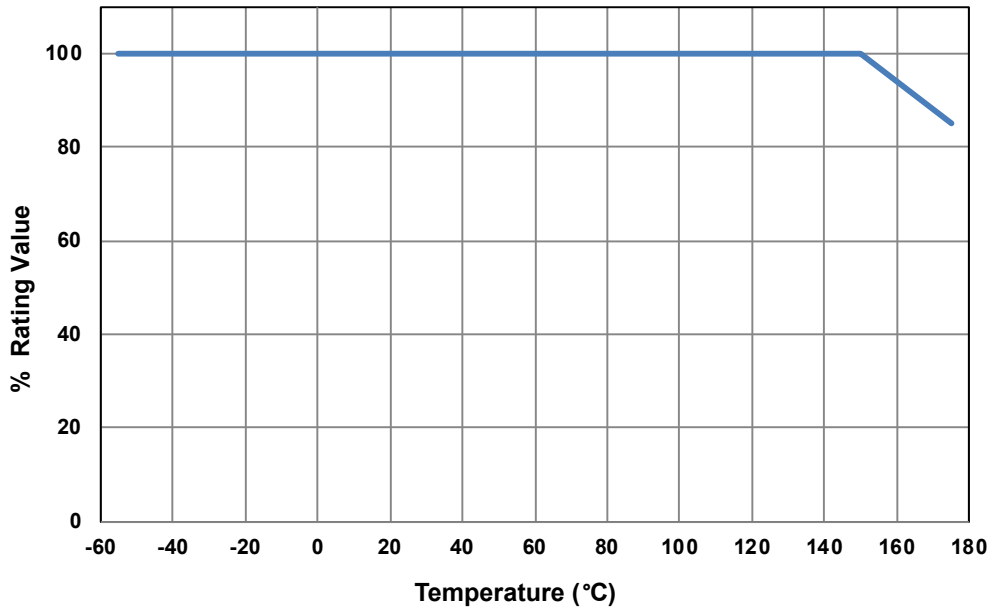

VTA3 (+150°C): V-I CHARACTERISTICS

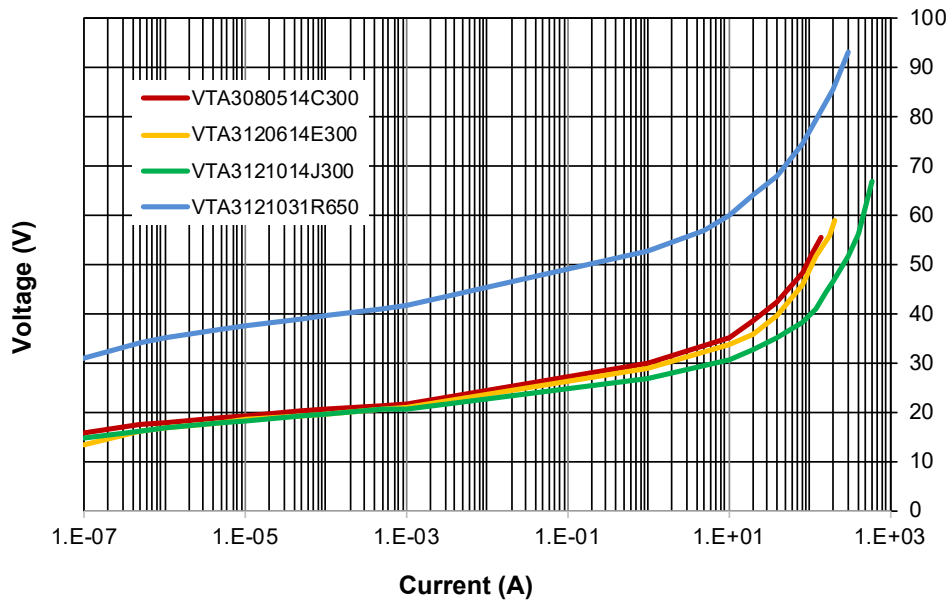


High Temp. Automotive VT Series

+150°C and 175°C Rated Varistors



VTA3 (+150°C): FORWARD TRANSMISSION CHARACTERISTICS (S21)

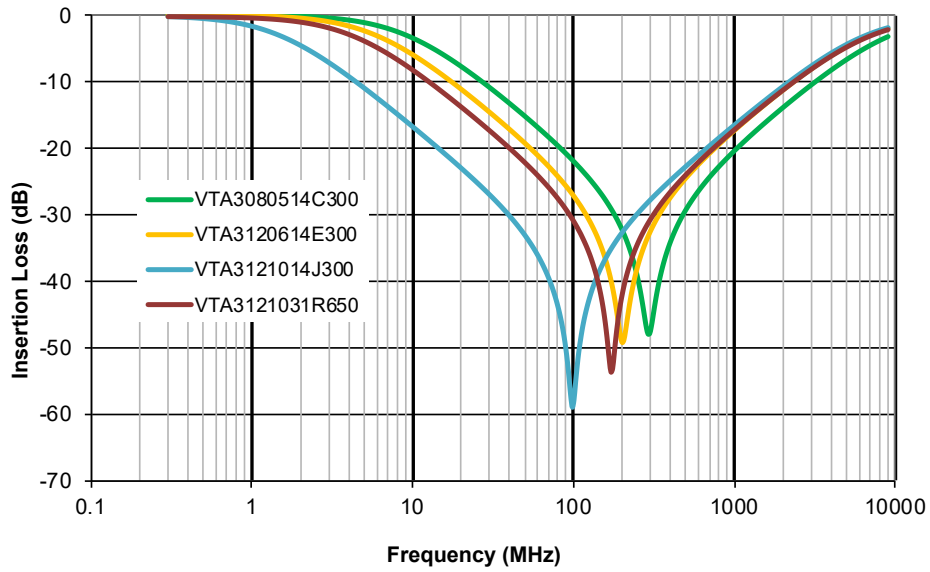


High Temp. Automotive VT Series


+150°C and 175°C Rated Varistors



VTA7 (+175°C): POWER DERATING CURVE (CURRENT, ENERGY, POWER)

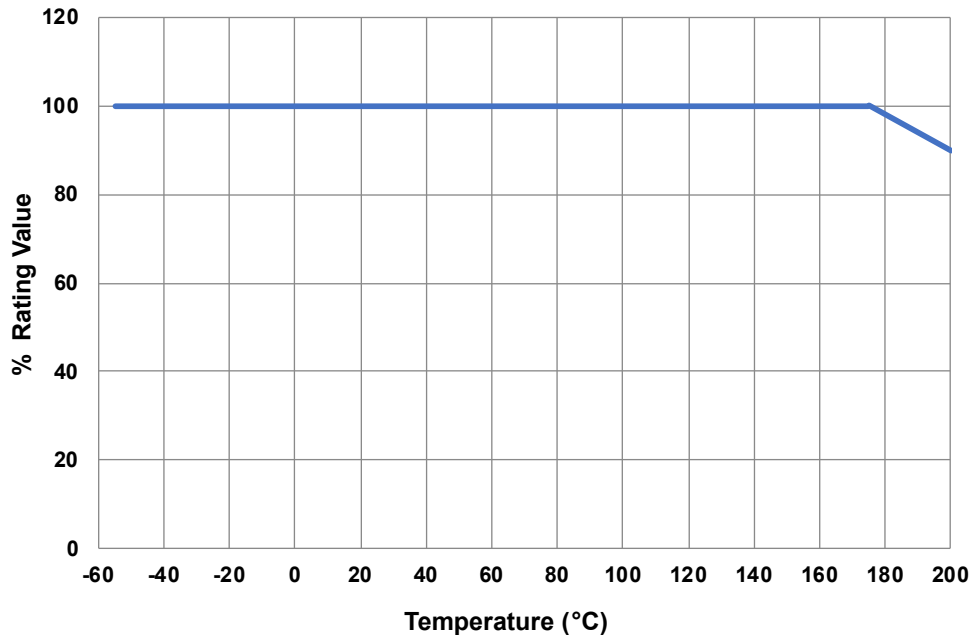

VTA7 (+175°C): CAPACITANCE VS TEMPERATURE

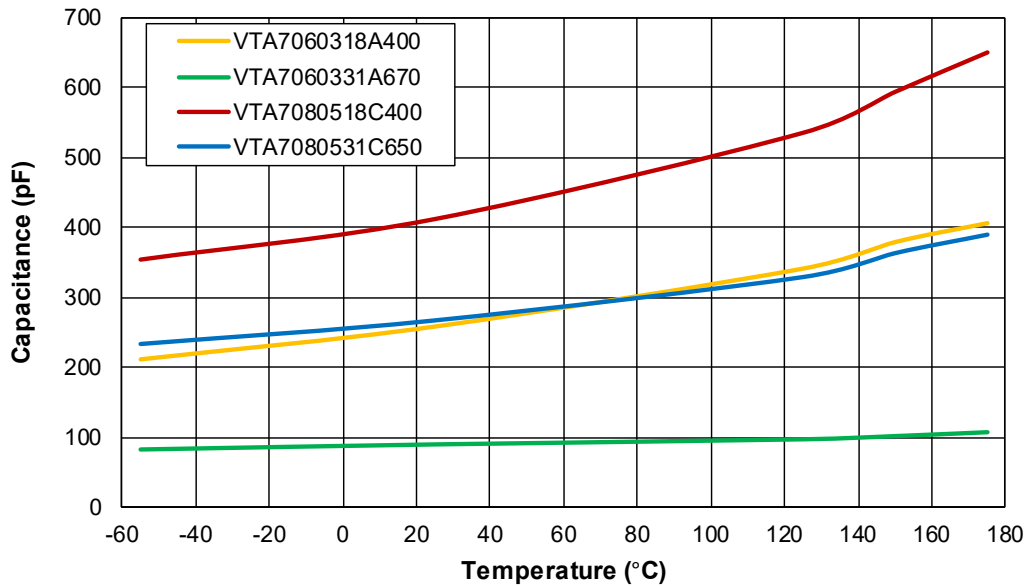


High Temp. Automotive VT Series

+150°C and 175°C Rated Varistors




VTA7 (+175°C): V-I CHARACTERISTICS


VTA7060318A400

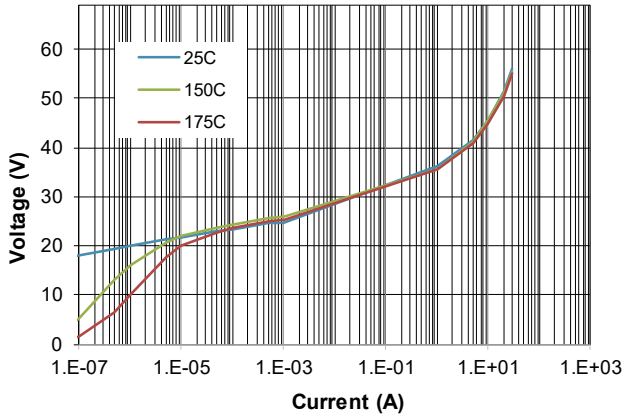


VTA7060331A650

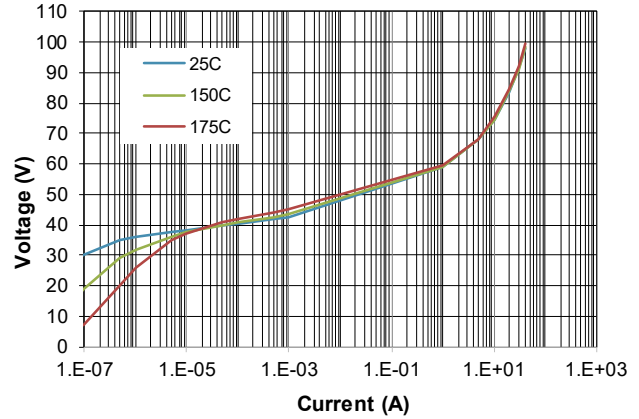


VTA7080518C400

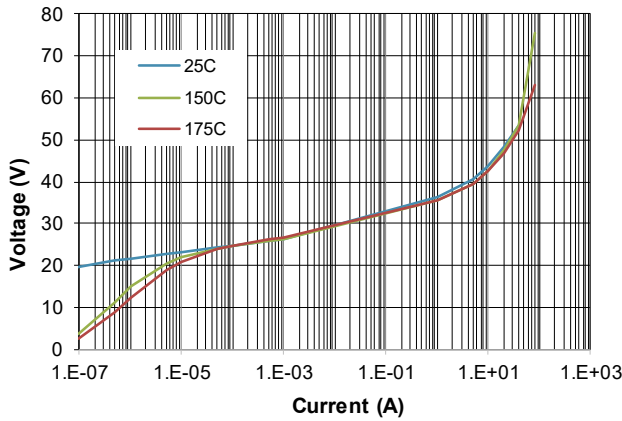

VTA7080531C650

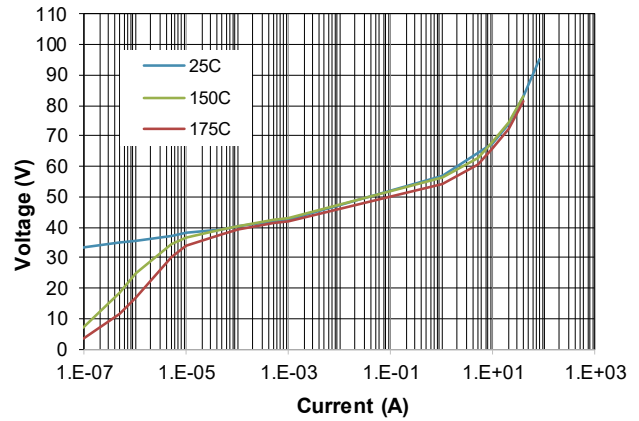

VTA7060314A300

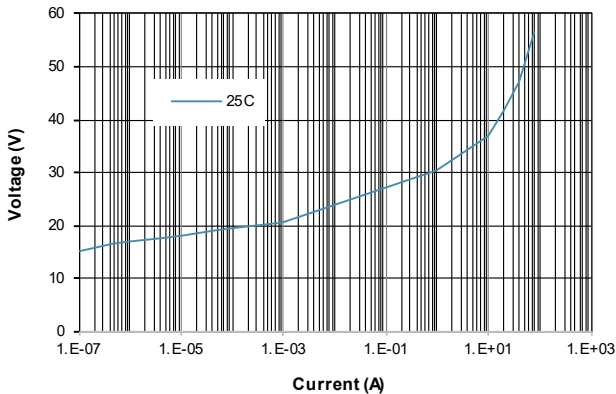

High Temp. Automotive VT Series

+150°C and 175°C Rated Varistors

VTA7 (+175°C): FORWARD TRANSMISSION CHARACTERISTICS (S21)

