


MIS/MOS Single Layer Capacitors



Metal Insulator Semiconductor/Metal Oxide Semiconductor

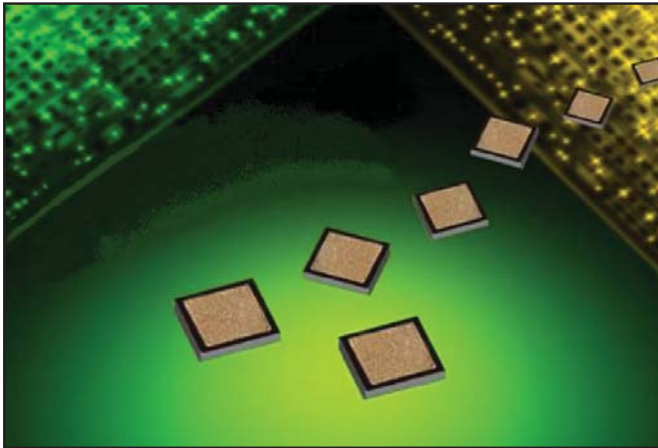

For applications in RF, Microwave and GHz ranges, AVX offers MIS/MOS Capacitors. These are Single Layer Capacitors (SLCs) that use Silicon Nitride or Silicon Dioxide to produce small, high Q, temperature stable, high break down voltage, low leakage capacitors. To ease assembly, AVX offers a wide range of termination styles for epoxy or solder die attach and subsequent Gold or Aluminum wire thermosonic and ultrasonic bonding. Custom applications and designs are welcome. Please contact your local representative.

BENEFITS

- MIS, SiON dielectric up to 100V applications
- MOS, SiO₂ dielectric up to 50V applications
- Sizes as small as 10 mils (254µm) squared
- DC to GHz operation
- High Q, low leakage

HOW TO ORDER

MS	20	3	S	100	M	3723	W
Series Code MS = MOS MI = MIS	Case Size Square size in mils 10, 20, 30, 40 OS = Special order please supply design	Working Voltage 2 = 2 WVDC 4 = 4 WVDC Z = 10 WVDC 3 = 25 WVDC 5 = 50 WVDC S = Special Order	Dielectric Code S = SiO ₂ for MOS Style ONLY N = SiON for MIS Style ONLY	Capacitance EIA Capacitance Code in pF. First two digits = significant figures or "R" for decimal place. Third digit = number of zeros or after "R" significant figures.	Capacitance Tolerance F = ± 1% J = ± 5% K = ± 10% M = ± 20%	Termination Code 1st position top layer 2nd position top bonding layer 3rd position bottom bonding layer 4th position bottom layer 1 = Al 4 = Ni 7 = TaN 2 = Cr 5 = Pd 8 = TiW 3 = Au 6 = Ta 9 = TiW/Ni OSOS = Special Order Please Supply Design	Packaging W = Antistatic Wafer Pack T = Tested Whole Wafer D = Tested Wafer Diced on Tape

TYPICAL ELECTRICAL SPECIFICATIONS


Material	MIS (SiON)	MOS (SiO ₂)
pF /mm ² Typical	150	85
TCC	± 60 ppm/°C	± 30 ppm/°C
Rated Voltage	≤ 100	≤ 50
Peak Voltage at +25°C	1.5x Rated	1.5x Rated
DF	≤ 0.1%	≤ 0.1%
Voltage Stability	Independent	Independent
Frequency Range	≤ 40 GHz	≤ 40 GHz

TEST METHODS

Specification	Parameter	Method of Paragraph
MIL-STD-883	Bond Strength	2011.7
MIL-STD-883	Shear Strength	2019
MIL-STD-202	Life	108

SPECIFIC CAPACITANCE (pF/mm²) VERSUS RATED VOLTAGE

MIS \ MOS Specific Capacitance vs Rated Voltage

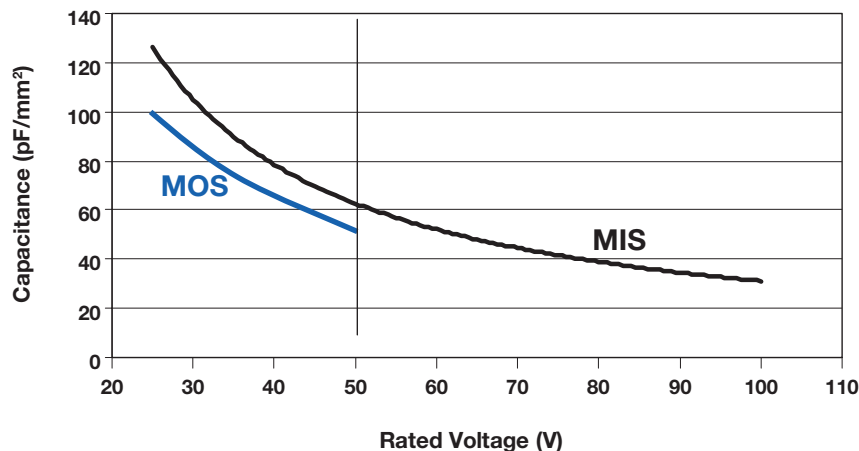


MIS/MOS Single Layer Capacitors




Metal Insulator Semiconductor/Metal Oxide Semiconductor

EXAMPLE S21 AND Q VERSUS FREQUENCY (DEFINE MEASUREMENTS)

Typical MOSCaps : 50M-25GHz
Au/TaN bond pad, Cr/Au back side

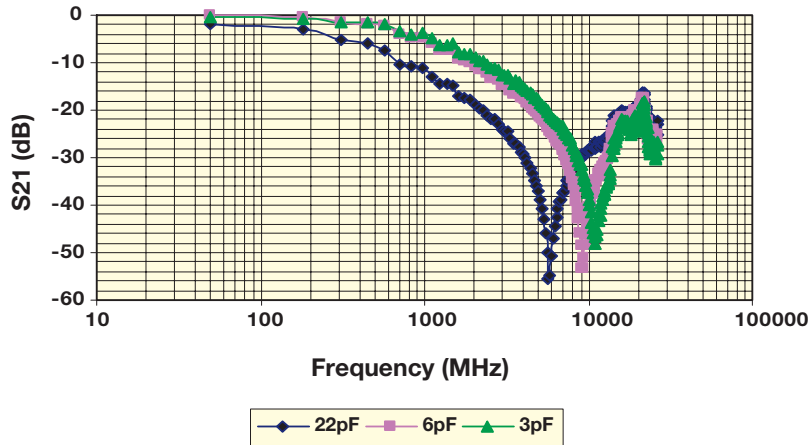

22 pF Q Vs Frequency

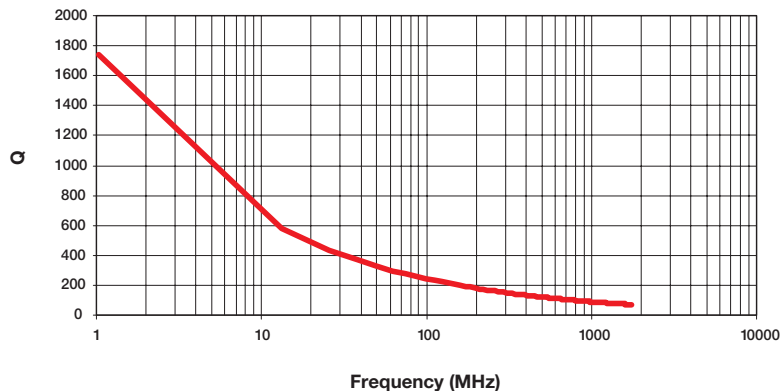

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.

© AVX Corporation

AMERICAS

AVX Myrtle Beach, SC
Corporate Offices

Tel: 843-448-9411
FAX: 843-448-1943

AVX Northwest, WA

Tel: 360-699-8746
FAX: 360-699-8751

AVX North Central, IN

Tel: 317-848-7153
FAX: 317-844-9314

AVX Mid/Pacific, CA

Tel: 510-661-4100
FAX: 510-661-4101

AVX Midwest, MN

Tel: 952-974-9155
FAX: 952-974-9179

AVX Northeast, MA

Tel: 617-479-0345
FAX: 843-916-7614

AVX Southwest, AZ

Tel: 602-678-0384
FAX: 602-678-0385

AVX South Central, TX

Tel: 214-566-2859
FAX: 972-461-0575

AVX Southeast, GA

Tel: 404-608-8151
FAX: 770-972-0766

AVX Canada

Tel: 905-238-3151
FAX: 905-238-0319

AVX South America

Tel: ++55-11-2193-7200
FAX: ++55-11-2193-7210

EUROPE

AVX Limited, England
European Headquarters

Tel: ++44 (0) 1252-770000
FAX: ++44 (0) 1252-770001

AVX/ELCO, England

Tel: ++44 (0) 1638-675000
FAX: ++44 (0) 1638-675002

AVX S.A., France

Tel: ++33 (1) 69-18-46-00
FAX: ++33 (1) 69-28-73-87

AVX GmbH, Germany

Tel: ++49 (0) 8131-9004-0
FAX: ++49 (0) 8131-9004-44

AVX srl, Italy

Tel: ++390 (0)2 614-571
FAX: ++390 (0)2 614-2576

AVX Czech Republic

Tel: ++420 57 57 57 521
FAX: ++420 57 57 57 109

ASIA-PACIFIC

AVX/Kyocera, Singapore
Asia-Pacific Headquarters

Tel: (65) 6286-7555
FAX: (65) 6488-9880

AVX/Kyocera, Hong Kong

Tel: (852) 2-363-3303
FAX: (852) 2-765-8185

AVX/Kyocera, Korea

Tel: (82) 2-785-6504
FAX: (82) 2-784-5411

AVX/Kyocera, Taiwan

Tel: (886) 2-2698-8778
FAX: (886) 2-2698-8777

AVX/Kyocera, Malaysia

Tel: (60) 4-228-1190
FAX: (60) 4-228-1196

Elco, Japan

Tel: 045-943-2906/7
FAX: 045-943-2910

Kyocera, Japan - AVX

Tel: (81) 75-604-3426
FAX: (81) 75-604-3425

Kyocera, Japan - KDP

Tel: (81) 75-604-3424
FAX: (81) 75-604-3425

AVX/Kyocera,

Shanghai, China

Tel: 86-21 6341 0300
FAX: 86-21 6341 0330

AVX/Kyocera,

Beijing, China

Tel: 86-10 8458 3385
FAX: 86-10 8458 3382

ASIA-KED

KED, Hong Kong

Tel: (852) 2305 1080
FAX: (852) 2305 1405

KED, Shanghai

Tel: (86) 21 6859 9898
FAX: (86) 21 5887 2542

KED, Beijing

Tel: (86) 10 5869 4655
FAX: (86) 10 5869 4677

KED, South Korea

Tel: (82) 2 783 3288
FAX: (82) 2 783 3207

KED, Taiwan

Tel: (886) 2 2950 0268
FAX: (886) 2 2950 0520

KED, Singapore

Tel: (65) 6255 3122
FAX: (65) 6255 5092



A KYOCERA GROUP COMPANY

<http://www.avx.com>

S-MOS00M1006-N